

# LADDERS & SCAFFOLDING

## TILT-N-ROLL STEP STANDS

- Frame is welded 1" round steel tubing
- Non-clogging slip resistant steel steps
- Handle allows step stand to move easily on two 4" casters
- Step Dimensions: 22" x 8"
- Top Step Dimensions: 22" x 16"
- Capacity: 300 lbs.
- Durable Kleton blue enamel finish
- Meets ANSI standard A14.7



VC336



**KLETON**

| Model No. | Number of Steps | Top Step Height" | Base Dimensions W" x D" | Wt. lbs. | Price /Each |
|-----------|-----------------|------------------|-------------------------|----------|-------------|
| VC335     | 1               | 12               | 29 x 16                 | 24       |             |
| VC336     | 2               | 19               | 29 x 24                 | 33       |             |

## TILT-N-ROLL LADDERS

- Balanced design allows ladder to tilt into the rolling position
- One piece all-welded steel construction
- 30" high rails with 22" wide expanded metal steps
- Oversize 22" x 24" top step for easier worker movement
- Legs have rubber tips that hold ladder secure during use
- Ladder moves easily on two 4" casters
- Capacity: 300 lbs.
- Durable Kleton blue enamel finish
- Meets ANSI standard A14.7



MD603

Optional MH242



| Model No. | No. of Steps | Step W" x D" | Rise Height" | Top Step Height" | Top Step W" x D" | Height Top Rail" | Overall Dimensions W" x D" x H" | Wt. lbs. | Price /Each |
|-----------|--------------|--------------|--------------|------------------|------------------|------------------|---------------------------------|----------|-------------|
| MD603     | 3            | 22 x 8       | 9            | 27               | 22 x 24          | 30               | 25 x 44 x 57                    | 70       |             |
| MD604     | 4            | 22 x 8       | 9            | 38               | 22 x 24          | 30               | 25 x 50 x 68                    | 81       |             |
| MD605     | 5            | 22 x 8       | 9            | 47               | 22 x 24          | 30               | 25 x 56 x 77                    | 93       |             |
| MD606     | 6            | 22 x 8       | 9            | 56               | 22 x 24          | 30               | 25 x 62 x 86                    | 105      |             |

## ROLLING STEP STANDS

- Ideal wherever there is a need to reach materials
- Rolls easily into position and locks firmly to the floor for maximum safety
- All the ladders operate on spring-loaded casters
- Casters retract under operator's weight and rubber feet drop down
- Non-clogging slip-resistant steel steps
- Frame is welded 1" round steel tubing
- Capacity: 300 lbs.
- Durable Kleton blue enamel finish
- Meets ANSI standard A14.7



VC131



VC134



**KLETON**

| Model No. | Number of Steps | Step Size W" x D" | Top Step Height" | Top Step W" x D" | Base Dim. W" x D" | Wt. lbs. | Price /Each |
|-----------|-----------------|-------------------|------------------|------------------|-------------------|----------|-------------|
| VC131     | 2               | 18 x 8            | 19               | 18 x 16          | 20 x 26           | 28       |             |
| VC132     | 3               | 18 x 8            | 28               | 18 x 16          | 20 x 30           | 38       |             |
| VC133     | 4               | 18 x 8            | 37               | 18 x 16          | 20 x 37           | 48       |             |
| VC134     | 5               | 18 x 8            | 46               | 18 x 16          | 20 x 41           | 57       |             |

## TRAILER ACCESS ROLLING LADDER

- Provides secure, safe access to cube vans/trailers
- All welded steel construction, ships fully assembled and ready to use
- Front walk through with chain/snap assembly
- Non-clogging slip resistant steps
- 10" flat-free wheels in rear
- Drop down handles in front for easy maneuvering
- Durable Kleton blue enamel finish
- Made in accordance with the ANSI A14.7 safety standard
- Frame Material: Steel
- Step Type: Perforated
- Capacity: 300 lbs.




MO010



| Model No. | No. of Steps | Step W" x D" | Platform H" x D" | Overall Dimensions W" x D" x H" | Wt. lbs. | Price /Each |
|-----------|--------------|--------------|------------------|---------------------------------|----------|-------------|
| MO010     | 4            | 22 x 8       | 37 x 16          | 33 x 40 x 78                    | 78       |             |
| MO011     | 5            | 22 x 8       | 46 x 16          | 33 x 46 x 87                    | 89       |             |
| MO012     | 6            | 22 x 8       | 55 x 16          | 33 x 51 x 96                    | 100      |             |

## MECHANICS/MAINTENANCE ROLLING LADDERS

- Double-straddle base puts worker in close proximity for hard-to-reach jobs
- Tilt and roll wheelbarrow style mobility allows easy movement over rough surfaces
- Oversize 22" x 24" top step for easier worker movement
- Removable 10" D x 24" W tool tray fits on front or side railing included
- Capacity: 300 lbs.
- Durable Kleton blue enamel finish
- Meets ANSI standard A14.7

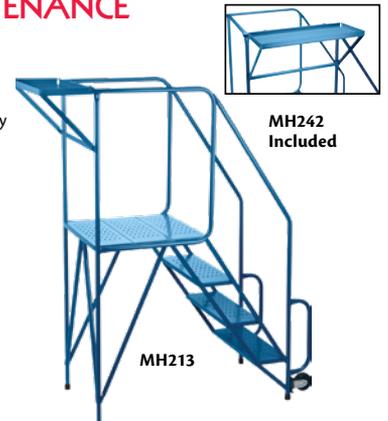

MH213

MH242 Included



| Model No. | No. of Steps | Step W" x D" | Rise Height" | Top Step Height" | Top Step W" x D" | Height Top Rail" | Overall Dimensions W" x D" x H" | Wt. lbs. | Price /Each |
|-----------|--------------|--------------|--------------|------------------|------------------|------------------|---------------------------------|----------|-------------|
| MH212     | 3            | 22 x 8       | 9            | 28               | 22 x 24          | 30               | 24 x 44 x 58                    | 85       |             |
| MH213     | 4            | 22 x 8       | 9            | 38               | 22" x 24"        | 30               | 24 x 50 x 68                    | 98       |             |
| MH214     | 5            | 22 x 8       | 9            | 47               | 22 x 24          | 30               | 24 x 56 x 77                    | 112      |             |
| MH215     | 6            | 22 x 8       | 9            | 57               | 22 x 24          | 30               | 24 x 68 x 87                    | 125      |             |